




PVC-CHEM RED 17-135

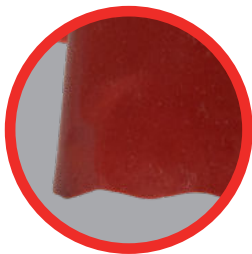

CHARACTERISTICS

- Glove with full PVC coating
- Jersey cotton liner
- Double-dipped glove with scalloped edge (slip-on)
- Comfortable to wear due to the jersey lining
- Extremely supple glove that protects the user's hand and lower arm against various chemicals
- Sanitised to inhibit bacterial growth, minimize odours and encourage freshness
- Length: 350 mm
- Thickness: 1.3 mm

Article number: 1.17.135.00

SUITABLE FOR ACTIVITIES IN E.G.

- Petrochemistry
- Industry
- Transport & logistics
- Cleaning services
- Shipping
- Agriculture

COLOUR

Red

SIZES

10/XL

PACKAGING

- 12 pairs per bundle
- 72 pairs per outer box

CE 0598

EN 420:2003+A1:2009

EN388:2016



4121X

EN ISO 374-1:2016/Type A



AKLMPST


EN ISO 374-5:2016



VIRUS

PRODUCT INFORMATION

| SIZE | ARTICLE NO. | EAN CODE 12 PAIRS (BUNDLE) | EAN CODE 72 PAIRS (OUTER BOX) |
|-------|-------------|-------------------------------|----------------------------------|
| 10/XL | 1.17.135.00 | 8718249006708 | 8718249006715 |

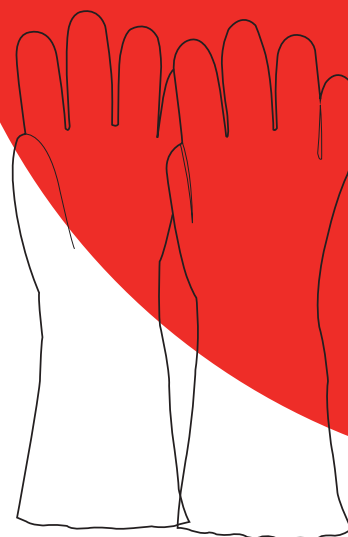

CLARIFICATION OF PICTOGRAMS

EN388:2016



4121X

EN388:2016



abcdef

Protection against mechanical hazards

A = Scuff resistance (0-4)
B = Cut resistance (0-5)
C = Tear resistance (0-4)
D = Puncture resistance (0-4)
E = Cut resistance (in accordance with EN ISO 13977 (A to F))
F = Impact resistance (optional) (P = Passed)

Note: X = untested or not applicable

STORAGE CONDITIONS

The gloves should be kept in a clean, cool and dry place and not kept compressed in their original packaging. Do not expose the gloves to direct sunlight. Make sure that the packaging and the gloves are not damaged during shipping.

TESTING INSTITUTE

These gloves are certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Cloness, Dublin D15 YN2P, Ireland.

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, we refer you to the following link: www.oxxa-safety.com/doc

Protection against chemicals and microorganisms

| EN ISO 374-1:2016/Type A | |
|---------------------------|--------------------------------|
| Chemicals | EN 15523:2015 permeation level |
| EN ISO 374-1:2016 /Type A | |
| n-Heptane (J) | 2 |
| 40% Sodium Hydroxide (K) | 6 |
| 96% Sulphuric Acid (L) | 3 |
| 65% Nitric acid (M) | 3 |
| 30% Hydrogen peroxide (P) | 6 |
| 40% Hydrofluoric acid (S) | 5 |
| 37% Formaldehyde (T) | 6 |

| EN ISO 374-4:2019 | |
|---------------------------|-----------------------------------|
| Cas number | Class |
| (J) 142-82-5 | Saturated hydrocarbon |
| (K) 1310-73-2 | Inorganic base |
| (L) 7664-93-9 | Inorganic mineral acid, oxidising |
| (M) 7697-37-2 | Inorganic mineral acid, oxidising |
| (P) 7722-84-1 | Peroxide |
| (S) 7664-39-3 | Inorganic mineral acid |
| (T) 50-00-0 | Aldehyde |
| Chemicals | Average degradation % |
| n-Heptane (J) | 3.9% |
| 40% Sodium Hydroxide (K) | 13.5% |
| 96% Sulphuric Acid (L) | 62.4% |
| 65% Nitric acid (M) | 34.3% |
| 30% Hydrogen peroxide (P) | -1.7% |
| 40% Hydrofluoric acid (S) | X |
| 37% Formaldehyde (T) | 1.4% |

Resistant against bacteria, mould and viruses

| EN ISO 374-5:2016 | | |
|----------------------|---------------------------------------|----------------------------|
| EN ISO 374-5:2016 | Resistance against bacteria and mould | Resistance against viruses |
| VIRUS | PASS | PASS |
| EN ISO 374-2:2014 | | |
| Air leak test - Pass | Water leak test - Pass | |

EN ISO 374-1:2016 Permeation levels are based on the following breakthrough times:

| Performance level | 1 | 2 | 3 | 4 | 5 | 6 |
|--------------------------------------|-----|-----|-----|------|------|------|
| Minimal breakthrough times (in min.) | >10 | >30 | >60 | >120 | >240 | >480 |

RELATED PRODUCTS



PVC-CHEM-RED 17-135

Art. no. 1.17.135.00



PVC-CHEM-GREEN 20-427

Art. no. 1.20.427.10

YOUR SUPPLIER: