



DEXTERITY



LIGHTLY  
POWDERED



CHEMICAL  
RESISTANT

# LATEX STRONG 44-160



## CHARACTERISTICS

- Powdered latex glove
- Smooth inside
- Supple and pleasant to wear
- Very easy to put on thanks to rolled edge
- Suitable for the right and left hand (ambidextrous)
- Suitable for contact with many foods
- Meets the EN 455 requirement for medical examination gloves
- Length: 240 mm and thickness: 0.10 mm
- Weight: 6.5 grams (+/- 0.3 grams)
- AQL 1.5 (EN 374)
- Gloves are for single use only
- Packed per 100 pieces in a dispenser

**Article number: 1.44.160.00**

## SUITABLE FOR ACTIVITIES IN E.G.

- Food industry
- Agri
- Hospitality
- Maintenance
- Cleaning
- Automotive

## COLOUR

Natural

## OTHER AVAILABLE COLOURS

Blue (art.no. 1.44.161.00)

## SIZES

6/XS to 10/XL incl.

## PACKAGING

- 100 pieces per dispenser
- 10 dispensers in a case

EN ISO 374-1:2016  
+A1:2018/Type C



K

EN ISO 374-5:  
2016




EN 455

**CE 1639**  
EN 420:2003+A1:2009


### PRODUCT INFORMATION

SIZE	ARTICLE NO.	EAN CODE 100 PIECES (DISPENSER)	EAN CODE 10 DISPENSERS (CASE)
6/XS	1.44.160.06	8718249008245	8718249008252
7/S	1.44.160.07	8718249008269	8718249008276
8/M	1.44.160.08	8718249008283	8718249008290
9/L	1.44.160.09	8718249008306	8718249008313
10/XL	1.44.160.10	8718249008320	8718249008337

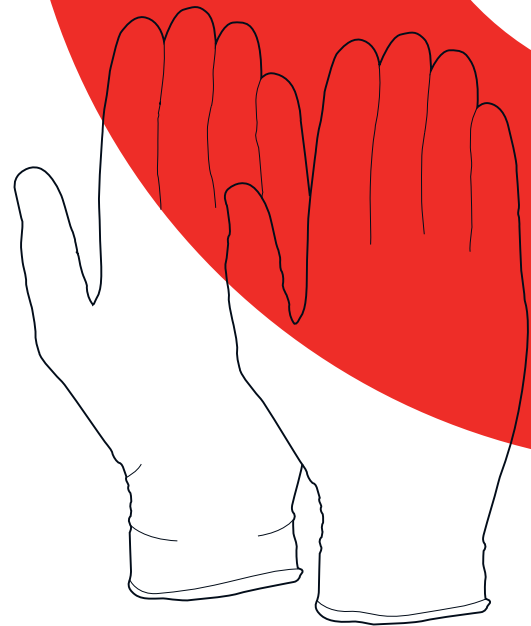


### CLARIFICATION OF PICTOGRAMS

#### Protection against chemicals and micro-organisms

EN ISO 374-1:2016/Type B		
EN ISO 374-1:2016 /Type A	Chemicals	EN 16523:2015 permeation level
 K	40% Sodium Hydroxide (K)	6
EN ISO 374-4:2019		
CAS number (K) 1310-73-2	Class Inorganic base	
Chemical 40% Sodium Hydroxide (K)	Average decrease % -33.0%	

#### Resistance to bacteria & fungi and virus

EN ISO 374-5:2016		
EN ISO 374-2:2014	Resistance to bacteria & fungi	Virus resistance
 VIRUS	PASS	PASS

EN ISO 374-2:2014	
Air leak test - Pass	Water leak test - Pass

EN ISO 374-1:2016+A1:2018 Permeation levels are based on the following lead times:

Performance level	1	2	3	4	5	6
Minimum breakthrough times (in min.)	>10	>30	>60	>120	>240	>480

### STORAGE REQUIREMENTS

The gloves should be stored in a clean, cool and dry place and not kept compressed in the original packaging. Do not expose the gloves to direct sunlight. Make sure that the packaging and the gloves are not damaged when shipped.

### TESTING INSTITUTE

These gloves are certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Cloness, Dublin D15 YN2P, Ireland.

### DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, please refer to the following web link: [www.oxxa-safety.com/doc](http://www.oxxa-safety.com/doc)

### RELATED ITEMS



**LATEX-THIN 44-140**  
ART. NO. 1.44.140.00



**LATEX-STRONG 44-215**  
ART. NO. 1.44.215.00

### YOUR SUPPLIER: