



DEXTERITY



POWDER
FREE



CHEMICAL
RESISTANT

LATEX- STRONG 44-215 PF



CHARACTERISTICS

- Powder-free latex glove
- Smooth inside
- Supple and pleasant to wear
- Very easy to put on thanks to rolled edge
- Suitable for the right and left hand (ambidextrous)
- Suitable for contact with many foods
- Meets the EN 455 requirement for medical examination gloves
- Length: 240 mm and thickness: 0.10 mm
- Weight: 5.8 grams (+/- 0.3 grams)
- AQL 1.5 (EN 374)
- Gloves are for single use only
- Packed per 100 pieces in a dispenser

Article number: 1.44.215.00

SUITABLE FOR ACTIVITIES IN E.G.

- Food industry
- Agri
- Hospitality
- Maintenance
- Cleaning
- Automotive

COLOR

Natural

SIZES

7/S to 10/XL

PACKAGING

- 100 pieces per dispenser
- 10 dispensers in outer box

EN ISO 374-1:2016
+A1:2018/Type C



K

EN ISO 374-5:
2016




EN 455

CE 1639
EN 420:2003+A1:2009


PRODUCT INFORMATION

| SIZE | ARTICLE NO. | EAN CODE 100 PIECES (DISPENSER) | EAN CODE 10 DISPENSERS (OUTER BOX) |
|-------|-------------|------------------------------------|---------------------------------------|
| 7/S | 1.44.215.07 | 8718249008429 | 8718249008436 |
| 8/M | 1.44.215.08 | 8718249008443 | 8718249008450 |
| 9/L | 1.44.215.09 | 8718249008467 | 8718249008474 |
| 10/XL | 1.44.215.10 | 8718249008481 | 8718249008498 |

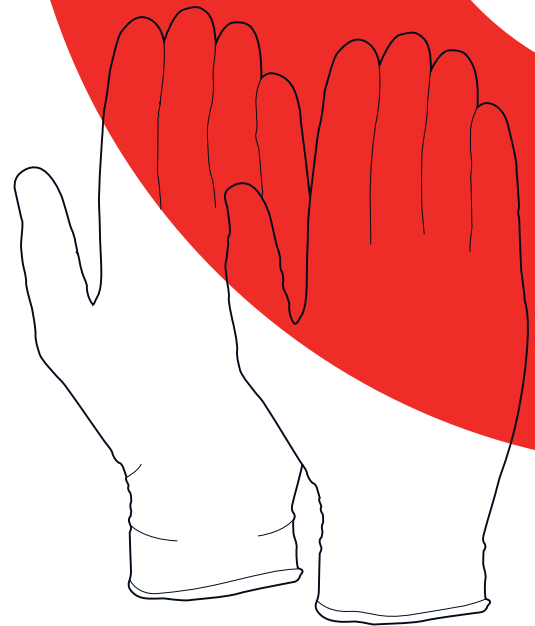


CLARIFICATION OF PICTOGRAMS

Protection against chemicals and micro-organisms

| EN ISO 374-1:2016/Type B | | |
|--|--------------------------|-----------------------------------|
| EN ISO 374-1:2016 /Type A | Chemicals | EN 16523:2015 permeation level |
|  K | 40% Sodium Hydroxide (K) | 6 |

| EN ISO 374-4:2019 | |
|--------------------------------------|------------------------------|
| CAS number (K) 1310-73-2 | Class Inorganic base |
| Chemical 40% Sodium Hydroxide (K) | Average decrease % -33.0% |

Resistance to bacteria & fungi and virus

| EN ISO 374-5:2016 | | |
|--|-----------------------------------|------------------|
| EN ISO 374-2:2014 | Resistance to bacteria & fungi | Virus resistance |
|  VIRUS | PASS | PASS |

| EN ISO 374-2:2014 | |
|----------------------|------------------------|
| Air leak test - Pass | Water leak test - Pass |

EN ISO 374-1:2016+A1:2018 Permeation levels are based on the following lead times:

| Performance level | 1 | 2 | 3 | 4 | 5 | 6 |
|--|-----|-----|-----|------|------|------|
| Minimum breakthrough times (in min.) | >10 | >30 | >60 | >120 | >240 | >480 |

STORAGE CONDITIONS

The gloves should be stored in a clean, cool and dry place and not kept compressed in the original packaging. Do not expose the gloves to direct sunlight. Make sure that the packaging and the gloves are not damaged when shipped.

TESTING INSTITUTE

These gloves are certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Cloness, Dublin D15 YN2P, Ireland.

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, please refer to the following web link: www.oxxa.work/doc

RELATED PRODUCTS



LATEX-THIN 44-140
ART. No. 1.44.140.00



LATEX-STRONG 44-160
ART. No. 1.44.160.00

YOUR SUPPLIER: