








R CHEMICAL RESISTANT

NITRI-COMFORT 44-520

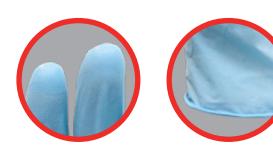



CHARACTERISTICS

- · Unpowdered non-sterile disposable nitrile glove
- Glove with relief
- · Smooth interior
- · Extremely easy to slip on due to the rolled cuff
- · Ambidextrous design
- 100% latex-free to accommodate users with a latex allergy
- · Free of silicones
- · Length: 240 mm and thickness: 0.10 mm
- · Weight: 4.7 grams (+/- 0.2 grams)
- AQL 1,5 (EN 374)
- · Suitable for contact with many types of food products
- Meets the requirements of the EN 455 standard for medical disposable gloves
- · Packaged per 100 units in a dispenser

Article number: 1.44.520.00

SUITABLE FOR ACTIVITIES IN E.G.

- · Food industry
- Agriculture
- Hospitality
- Maintenance
- · Chemical sector
- Automotive

COLOUR

Blue

SIZES

7/S to 11/ XL incl.

PACKAGING

- · 100 units per dispenser
- · 10 dispensers in outer box

EN ISO 374-1:2016 +A1:2018/Type B





EN ISO 374-5:

EN 421:20




C € 2777

EN 420:2003+A1:2009



PRODUCT INFORMATION

SIZE	ARTICLE NO.	EAN CODE 100 UNITS (DISPENSER)	EAN CODE 10 DISPENSERS (OUTER BOX)
7/S	1.44.520.07	8718249008504	8718249065569
8/M	1.44.520.08	8718249008528	8718249065576
9/L	1.44.520.09	8718249008542	8718249065583
10/XL	1.44.520.10	8718249008566	8718249065590
11/XXL	1.44.520.11	8718249008580	8718249065606

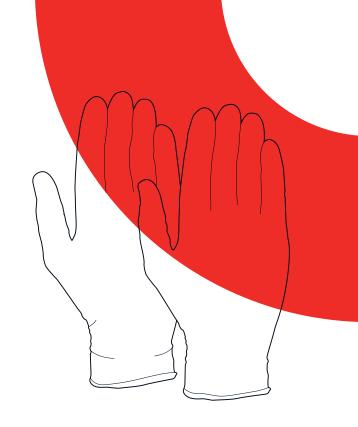

CLARIFICATION OF PICTOGRAMS

Protection against chemicals and microorganisms

EN ISO 374-1:2016/Type B						
EN ISO 374-1:2016 /Type A	Chemicals	EN 16523:2015 permeation level				
	40% Sodium Hydroxide (K) 30% Hydrogen peroxide (P)	6 4				
KPT	37% Formaldehyde (T)	6				

EN ISO 374-4:2019				
Cas number	Class			
(K) 1310-73-2	Inorganic base			
(P) 7722-84-1	Peroxide			
(T) 50-00-0	Aldehyde			
Chemicals	Average degradation %			
40% Sodium Hydroxide (K)	-3.9%			
30% Hydrogen peroxide (P)	8.1%			
37% Formaldehyde (T)	2.9%			

Resistant against bacteria, mould and viruses

EN ISO 374-5:2016						
EN ISO 374-2:2014	Resistance against bacteria and mould	Resistance against viruses				
VIRUS	PASS	PASS				

Water leak test – Pass

EN ISO 374-1:2016 Permeation levels are based on the following breakthrough times:

Air leak test – Pass

-						
Performance level		2	3	4	5	6
Minimal breakthrough times (in min.)	>10	>30	>60	>120	>240	>480

STORAGE CONDITIONS

The gloves should be kept in a clean, cool and dry place and not kept compressed in their original packaging. Do not expose the gloves to direct sunlight. Make sure that the packaging and the gloves are not damaged during shipping.

TESTING INSTITUTE

YOUR SUPPLIER:

These gloves are certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Clonee, Dublin D15 YN2P, Ireland.

DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, we refer you to the following link: www.oxxa.work/doc

EN 421:2010



Protection against contamination with radioactive particles. Note: This glove does not protect the wearer against mechanical hazards.

RELATED PRODUCTS



NITRI-STRONG 44-530

Art. no. 1.44.530.00