


Data sheet

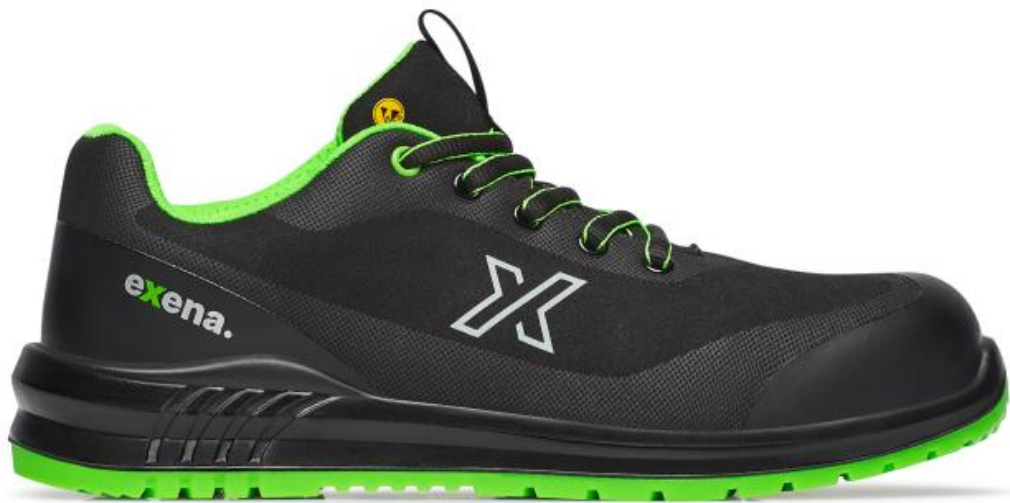

EN ISO 20345:2022

NATRIX S3 S FO SR ESD

SIZES FROM 36 TO 48

UPPER:

Micronubuk with antiabrasion skin

LINING:

Breathable synthetic fabric, resistant to abrasion

TOECAP:

Non metallic, non-magnetic, 200 J

PIERCE RESISTANCE:

Textile pierced proof footbed "PS" class

FOOTBED:

Removable, cushioned, antistatic

OUTSOLE:

PU 2D antislip SR

MONDOPOINT®:

Natural comfort 11

WEIGHT (42):

620 GR

Insole



Rebound

Technologies



Certifications



Intended use

- Logistic
- Plant Engineering
- Industry & Workshop
- Electronics