




Great contact cold and heat protection. Great flexibility, softness and comfort. Sandy latex.

KEY FEATURES

- Great cold and heat protection, cut protection level B
- Great flexibility, softness, comfort and fitting
- Sandy latex coating contributes a better grip performance
- High visibility orange color is also good for outdoor works or dark situation
- Individual pack available for retail shops

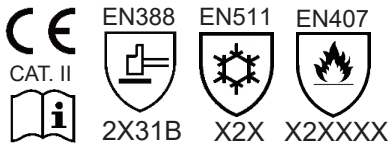

PRODUCT DETAILS

| | |
|---------------|---------------------------------|
| Liner | Brushed acrylic |
| Gauge | 10 |
| Coating | Latex |
| Finishing | Sandy |
| Colour | Orange |
| Size | 7,8,9,10,11 |
| Packing | 12 pairs/pack, 120 pairs/carton |
| Tariff number | 61161020 |

RECOMMENDED APPLICATIONS

Works in cold conditions in dry or wet or oily conditions.

Such as outdoor works (without raining/snowing), cold storage, maintenance, construction, machine operation, logistics, warehouse works and etc.



CERTIFICATION

CE EN21420:2020 + A1:2018

Category II

**EN388:2016 Mechanical protection:
levels obtained in laboratory tests**

| | |
|---|----------|
| Abrasion (min.0 to max. 4): | 2 |
| Blade cut - coupe test (Index) (min.0 to max. 5): | X |
| Tear (min.0 to max. 4): | 3 |
| Puncture (min.0 to max. 4): | 1 |
| Cut resistance from sharp objects EN ISO 13997:1999 (min. A to max. F, X - not tested): | B |
| Impact protection (P if pass, F if failed): | - |

EN388:2016



2X31B

EN21420:2020+A1:2018 Dexterity (min.0 to max.5):
level 5.

**EN511:2006 Cold protection:
levels obtained in laboratory tests**

| | |
|------------------------|--------------------------|
| A - Convective cold: | min.0 to max. 4 |
| B - Contact cold: | min.0 to max. 4 |
| C - Water penetration: | (1 if pass, 0 if failed) |

EN511:2006



X2X

X = not tested or testing method is unsuitable for the design of the gloves.

**EN407:2020 Heat protection:
levels obtained in laboratory tests**

| | |
|---------------------------------------|--------|
| A - Limited flame spread | X of 4 |
| B - Contact heat: | 2 of 4 |
| C - Convective heat: | X of 4 |
| D - Radiant heat: | X of 4 |
| E - Small splashes of molten metal: | X of 4 |
| F - Large quantities of molten metal: | X of 4 |

EN407:2020



X2XXXX

X = not tested or testing method is unsuitable for the design of the gloves.

STORAGE AND SHELF LIFE

Please store the products in original packing in a dry and cool place without direct sunlight in general. The shelf life depends on the storage and other conditions. For the new product stored in a properly way, the shelf life of Xcellent 51-500 can normally be 3 years.

CLEANING

Washing or dry-cleaning requires prior consultation with a recognized specialist, because such treatment may alter the protective properties of the glove. The gloves must always be checked for integrity before reuse. The rating with the marked performance levels based on tests on unused gloves.

WARNING

Don't use in case of chemicals or electrical risk.
Please ensure the products are strictly used within their protection levels.

