




Premium quality, water & oil repellent. Perfect dexterity. 15 gauge, double nitrile. Reinforced.

KEY FEATURES

- Premium quality cut protection glove, water and oil repellent palm
- Perfect dexterity, fitting and flexibility makes it also ideal for precision works
- Sandy finish provides super grip in oily and dry working condition
- Extra layer of coating makes it more durable and cost effective
- Reinforcement greatly extends glove life to save your cost and provides extra protection in the weakest area
- OEKO-TEX standard 100 certified for skin friendly

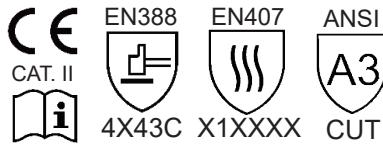

PRODUCT DETAILS

Liner	UHMWPE mixed with other yarns
Gauge	15
Coating	Nitrile
Finishing	Flat & Sandy
Colour	Dark Blue / Black & Grey
Size	7,8,9,10,11
Packing	12 pairs/pack, 144 pairs/carton
Tariff number	61161020

RECOMMENDED APPLICATIONS

General purpose or precision works with high cut hazard or contact heat hazard in dry or wet or oily conditions.

Such as precision works, assembly, handling parts with sharp or rough edges, maintenance, general handling, inspection, packaging, sorting, metal sheet works...



CERTIFICATION


 EN21420:2020

Category II

**EN388:2016 Mechanical protection:
levels obtained in laboratory tests**

Abrasion (min.0 to max. 4):

EN388:2016



4

X

4

3

C

-

Blade cut - coupe test (Index) (min.0 to max. 5):

Tear (min.0 to max. 4):

Puncture (min.0 to max. 4):

Cut resistance from sharp objects EN ISO

13997:1999 (min. A to max. F, X - not tested):

Impact protection (P if pass, F if failed):

EN21420:2020 Dexterity (min.0 to max.5):

level 5.

**EN407:2020 Heat protection:
levels obtained in laboratory tests**

A - Limited flame spread X of 4

B - Contact heat: 1 of 4

C - Convective heat: X of 4

D - Radiant heat: X of 4

E - Small splashes of molten metal: X of 4

F - Large quantities of molten metal: X of 4

EN407:2020



X = not tested or testing method is unsuitable for the design of the gloves.

STORAGE AND SHELF LIFE

Please store the products in original packing in a dry and cool place without direct sunlight in general.

The shelf life depends on the storage and other conditions. For the new product stored in a properly way, the shelf life of Xcellent 12-901 can normally be 5 years.

CLEANING

Washing or dry-cleaning requires prior consultation with a recognized specialist, because such treatment may alter the protective properties of the glove. The gloves must always be checked for integrity before reuse. The rating with the marked performance levels based on tests on unused gloves.

WARNING

Don't use in case of chemicals, moving machines or electrical risk.

Please ensure the products are strictly used within their protection levels.

